

THERMAL DYNAMICS®

A U T O M A T I O N

Ultra-Cut®

High Precision Plasma Cutting System



**Best Parts Life In
It's Class @ 400A!**

Your Partner in Plasma Automation

Automated Plasma Cutting

High Precision Plasma Cutting

The Ultra-Cut® delivers premium precision plasma cutting on mild steel and non-ferrous alloys. For non-ferrous material, **select our unique Water Mist Secondary process** for **best in class cut quality**. In addition, the Ultra-Cut systems can also be used for clean, efficient, **plasma marking** without having to change consumables.

Quality

- Excellent cross-free cuts using oxygen (O₂) plasma on mild steel
- Unmatched cut quality on non-ferrous materials by using Thermal Dynamics unique Water Mist Secondary (WMS®) process

Ease of Use

- Fast and easy installation
- Simple set-up and user-friendly gas console
- Quick-change consumable design, SpeedLok™
- Easy to identify and troubleshoot problems
- The automated Digital Flow Control increases ease of use and provides improved cut consistency

Productivity

- Highest cut speed in its class on stainless steel. The cut speed can be up to 3 times faster than with similar cutting systems
- Highest kW output in its class
- Outstanding parts life
- Reduced downtime during parts changes due to the SpeedLok cartridge design of the XT™-Torch
- Fastest switching times between marking and cutting processes



Ultra-Cut Power Supply



Automated Digital Flow Control (DFC-3000)



GCM-2010 Digitally Controlled Manual Gas Console



RAS-1000 Remote Arc Starter

Technology

- Microprocessor controlled to produce the best cut quality
- Fiber optic communication decreases HF interference
- Precision torch design offers the best cut quality in its class
- Higher cut speed than H35 with the use of N₂/H₂O on non-ferrous


Reliability

- Exhaustive lab testing and field trials ensure on-going performance and reliability

XT™-Torch Technology

Unique 'Keyless' Consumables Cartridge

The unique, SpeedLok™ Consumables Cartridge houses consumable parts only, no built-in head/torch body to drive replacement costs up. Changing cartridges is fast and easy – a couple of twists and the unique 'rapid engagement' retaining collar threads release the cartridge. Down-time is reduced to seconds and you can change from one process to another or from one application to another quickly and easily.

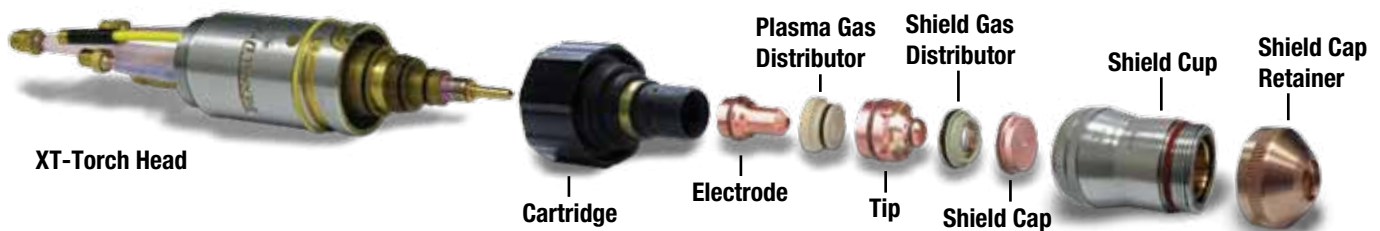

No Tools Required

Unlike other torches, no tools are required to change either the torch consumables or major components in the Torch Head.

'Leakless' Torch Head Design

Coolant doesn't drip from the torch head when the consumables cartridge is removed from the torch head.

Prevents air from entering the system and becoming trapped in the leads.

Self-centering Components

Consumable parts and torch body are precisely engineered to lock into place for absolute alignment and remain positioned cut after cut. Independently-aligned tip and electrode assures accurate re-centering of the consumable cartridge after each parts change. This guarantees best cut quality again and again.

Superior Warranty

Thermal Dynamics' XT-Torch warranty covers components and service for a full 1-year period.

Precision Cuts on all Metals

The XT-Torch dual gas technology provides the highest arc density plasma stream in the industry for precision cuts on mild steel, stainless steel, aluminum and other non-ferrous materials. Choices for plasma gas include Air, N₂, O₂ or Ar-H₂, shield gas choices include Air, N₂, O₂, H₂O, or Ar-H₂.

Relaxed Cutting Parameters

With the XT-Torch the operating window permits wide travel speed variance which means you'll get great cuts more often and less wasted material and time.


- Less critical standoff height
- Wider 'Operating Window' for dross-free cutting

Automated Plasma Cutting

Automated Digital Flow Control (DFC-3000)

Designed specifically for use with the high-precision Ultra-Cut systems, the automated DFC-3000 (Digital Flow Control) consists of three separate modules.

- The **TSC-3000 (Touch Screen Controller)** offers the only touch screen in the plasma industry today. The interface allows operators to quickly choose one of potentially 1000's of stored programs and start cutting by touching the green "Go" button. Future software upgrades can be made through the standard USB port.
- With the TSC-3000 older CNC's can also be used with an automatic gas console. No new CNC has to be purchased.

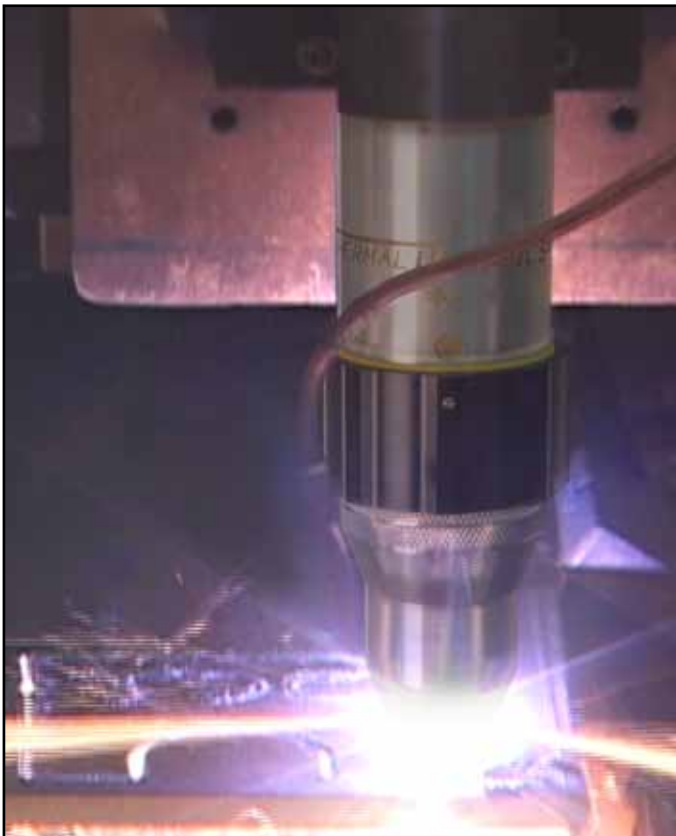

- The **DMC-3000 (Digital Manifold Control)** functions as the central manifold for all incoming gases. Having (7) inputs and (5) outputs, this unit enables the gas to be used according to the program selected.
- The **DPC-3000 (Digital Pressure Control)** controls/maintains gas flows and pressures needed to optimize the cutting process. The unit is normally mounted within 4' (1.2 m) of the cutting torch to minimize time to switch between processes.
- This automated Digital Flow Control system reduces set up time, minimizes set up errors, provides consistent performance, and offers the industry's only touch screen controller for easy set up and operation.

Why choose the automated Digital Flow Control?

- Easier to use
- No setup errors
- No need for CNC to control the DFC
- Uses the same parts for cutting and marking
- Reduced set up times
- Consistent cut quality
- Improved parts life and cut quality
- Easily switch between marking and cutting
- Integrates easily to most CNC's



TSC-3000 with Material Screen Shot



Marking Samples

Three Easy Setup Steps

1. Select the material
2. Select the thickness
3. Select the cut type
 - Best
 - Fastest
 - Robotic Bevel

You're Done!

When To Choose The Automated Digital Flow Control

Consider the automated DFC for:

- Easy setup
- More consistent cut quality
- Plasma marking
- When applications call for frequent changes in material types or thicknesses
- Optimizing cut quality
- Controlling the Ultra-Cut® system automatically





Automated Plasma Cutting

XTremeLife™ Consumables For Mild Steel


The XTremeLife technology delivers the parts life and cut quality on mild steel with O₂ plasma that the high-end customer expects. Unrivaled cut quality from gauge (0.5 mm) to 2" (50 mm) material with the widest range of consumables in the market.

- Bevel angles range three or better according to ISO 9013
- Square cut face with minimal top edge rounding
- Smooth cut edge surface
- Virtually dross-free parameter window up to 2" (50 mm)
- Consistent cut quality over entire parts life

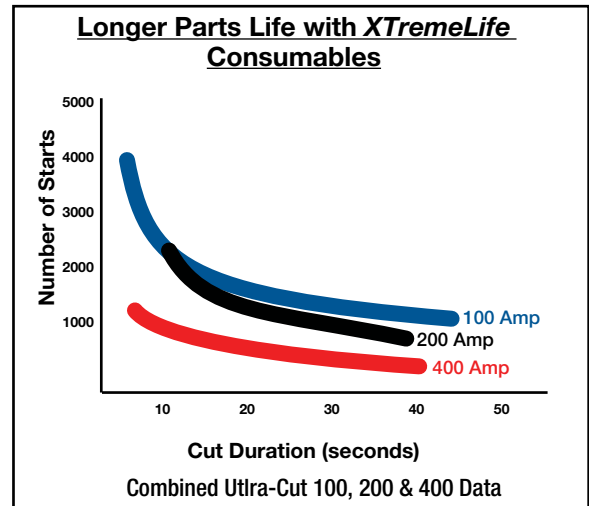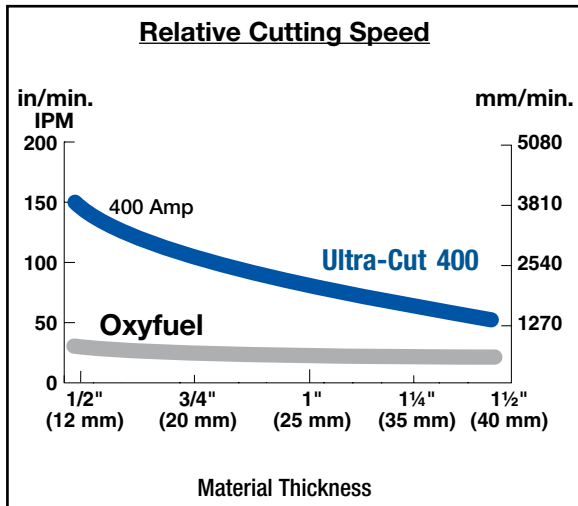

Ultra-Cut® 400 vs Oxyfuel

- Averages 3 times faster cut speeds
- Pierces 1¼" (35 mm) in 1.5 seconds
- One Ultra-Cut 400 can replace up to 4 oxy-fuel torches - each requiring their own height controls.
- Ultra-Cut 400 provides superior stainless steel and aluminum cut quality
- Higher arc density equals faster speeds without sacrificing cut quality
- Smaller tip orifices create a narrow kerf for tighter angles and radiuses at higher speeds - less material waste
- Patented consumable technology

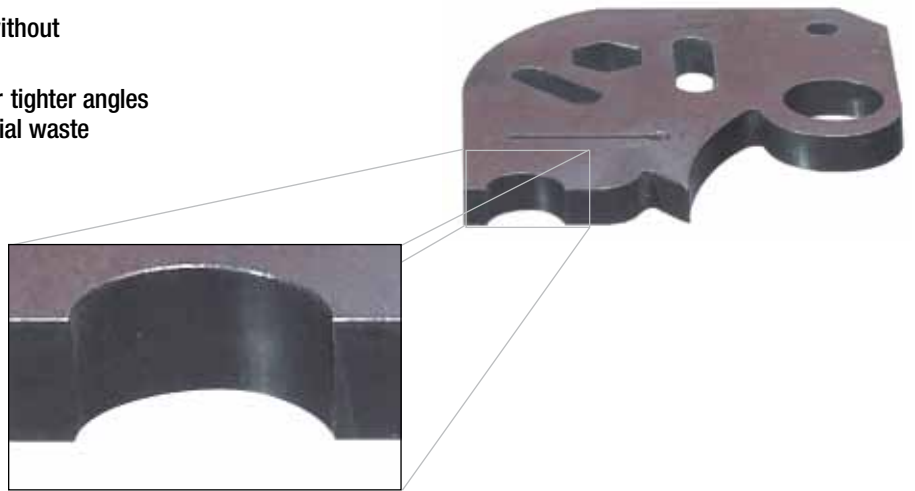

1/2" (12 mm) Cut Sample (detail)

XTR™ Robotic Torch

- Specifically designed for the Ultra-Cut® precision cutting systems
- One of the shortest Robotic torches on the market for ease of articulation and improved access. Only 9.3 (236 mm) in length
- Profile/Bevel consumables for improved access and bevel cutting

- Ultra-light, ultra-flexible, robust torch leads
- Torch mounting indicators for positive torch positioning
- Position teach tool for point to point programming

**New 15A and 30A
O₂ consumables**



**Easy Access
Consumables**




Automated Plasma Cutting

Water Mist Secondary (WMS[®]) For Non-Ferrous Materials

WMS delivers excellent non-ferrous cut quality and low cost of operation by using N₂ as plasma gas and ordinary tap water as the secondary. A reducing atmosphere is produced in the cut by the release of hydrogen from the secondary water. The reducing atmosphere decreases oxidation on the cut face surface. WMS is recommended for materials up to 1½" (25 mm) thick.



Cutting Aluminum with the Ultra-Cut[®] 200

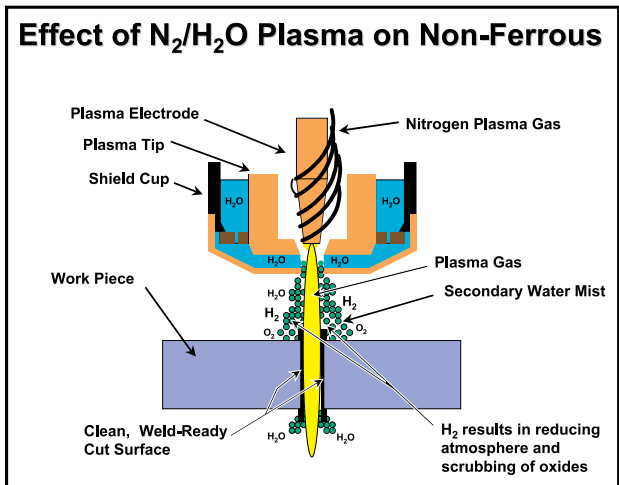

The WMS process uses nitrogen as the plasma gas while water is used as the secondary gas (shield gas). The water in the torch is divided into its principal components (hydrogen and oxygen) during the cutting process. The majority of the water used during the process (from 4 to 8 GPH (0.25 to 0.5 l/min)) is converted to principal components (gas) and thereby does not require disposal.

WMS Benefits


- Lowest operating cost
- Up to 3 times faster cutting speeds than H35
- Dross-free cutting
- Oxide-free cut surface
- Wide parameter window
- Easy to use
- Laser-like cut quality on Aluminum
- Small heat effected zone
- Less distortion
- Same weldability as H35



Example for 3/4" (20 mm) with WMS



Example for 1/4" (6 mm) Aluminum cut with WMS

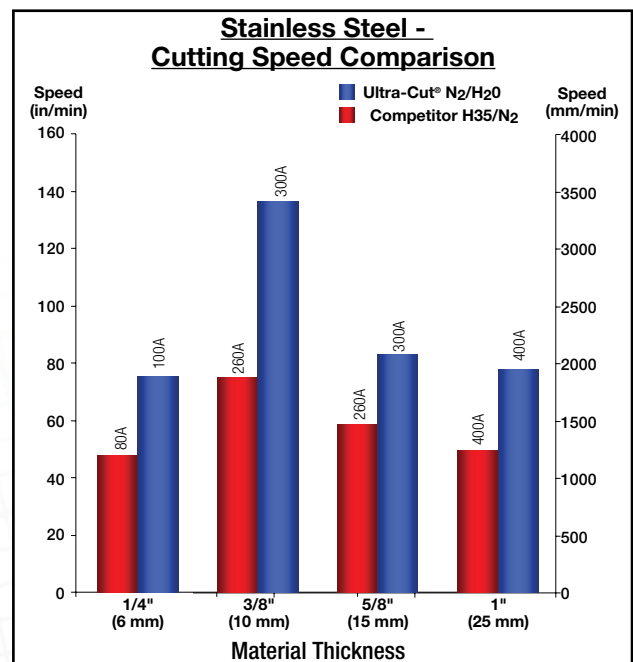

How To Select The Right System



| | Ultra-Cut® 100 | Ultra-Cut 200 |
|-------------------|----------------------|----------------------|
| Production Pierce | 1/2" (12 mm) | 1 1/4" (35 mm) |
| 1/4" (6 mm) | 150 ipm (3.21 m/min) | 200 ipm (5.08 m/min) |
| 1/2" (12 mm) | 64 ipm (1.63 m/min) | 115 ipm (2.92 m/min) |
| 3/4" (20 mm) | 25 ipm (0.64 m/min) | 65 ipm (1.65 m/min) |
| 1" (25 mm) | ————— | 48 ipm (1.22m/min) |



| | Ultra-Cut 300 | Ultra-Cut 400 |
|-------------------|----------------------|----------------------|
| Production Pierce | 1 1/2" (40 mm) | 2" (50 mm) |
| 1/4" (6 mm) | ————— | ————— |
| 1/2" (12 mm) | 140 ipm (3.55 m/min) | 150 ipm (3.21 m/min) |
| 3/4" (20 mm) | 100 ipm (2.54 m/min) | 115 ipm (2.92 m/min) |
| 1" (25 mm) | 70 ipm (1.78 m/min) | 80 ipm (2.10 m/min) |
| 1 1/2" (40 mm) | 35 ipm (0.9 m/min) | 45 ipm (1.10 m/min) |
| 2" (50 mm) | ————— | 30 ipm (0.7 m/min) |

*Cut speeds using O₂/Air on Mild Steel at max output current.

Automated Plasma Cutting

Ultra-Cut[®] 100

High Precision Plasma Cutting System

- **Production cut: 1/2" (12 mm)**
- **Maximum cut: 3/4" (20 mm)**
- **Ideal for robotic applications**

Specifications (subject to change without notice)


| | |
|----------------------------|---|
| Rated Output | 100 Amps |
| Output Range (A) | 10 - 100 Amps |
| Output (V) | 80 - 180V |
| Input Volts | 208-230/460V, 3ph, 50-60 Hz, 400V, 3ph, 50-60 Hz, 600V, 3ph, 50-60 Hz |
| Input Amps @ Rated Output | 60A @ 208V, 50A @ 230V, 35A @ 400V, 33A @ 460V, 26A @ 600V |
| Duty Cycle (@104°F / 40°C) | 100% @ 100A @ 180V (18kW) |
| MAX OCV | 380 VDC |
| Pre-Flow Gas | Air @ 120 psi (8.3bar) |
| Plasma Gas | O ₂ , H35, N ₂ , Air @ 120 psi (8.3bar) |
| Shield Gas | O ₂ , N ₂ , Air @ 120 psi (8.3bar) H ₂ O @ 10 GPH (0.6 l/min) |
| Weight | Power Supply - 343 lbs. (156kg) |
| Dimensions | H 41.5" (1054 mm) x W 27.5" (700 mm) x D 38.5" (978 mm) (Fully Assembled Power Supply) |
| Warranty | Two Years Power Supply & One Year Torch |
| Certifications | CE, CCC, CSA |



Cutting Speed Chart

| | |
|---|--------------|
| Torch Model | XT™-Torch |
| Production Piercing & Cutting Capacity (Mild Steel) | 1/2" (12 mm) |
| Maximum Piercing & Cutting Capacity (Mild Steel) | 5/8" (15 mm) |
| Maximum Edge Start (Mild Steel) | 3/4" (20 mm) |

| Material | Thickness Inch | Speed IPM | Amps | Plasma/ Shield | Thickness mm | Speed mm/min. |
|------------------------|----------------|-----------|------|----------------------------------|--------------|---------------|
| Mild Steel | | | | | | |
| | 20 ga. | 130 | 30 | O ₂ /O ₂ | 1 | 3050 |
| | 10 ga. | 30 | | | 3 | 910 |
| | 10 ga. | 210 | 70 | O ₂ /Air | 3 | 6620 |
| | 1/4 | 120 | | | 6 | 3100 |
| | 3/16 | 190 | 100 | O ₂ /Air | 5 | 4670 |
| | 1/4 | 150 | | | 6 | 4030 |
| | 3/8 | 95 | | | 10 | 2300 |
| | 1/2 | 64 | | | 12 | 1800 |
| | 5/8 | 50 | | | 15 | 1370 |
| Stainless Steel | | | | | | |
| | 26 ga. | 350 | 30 | Air/Air | 0.6 | 8300 |
| | 20 ga. | 300 | | | 1 | 7190 |
| | 16 ga. | 110 | | | 1.5 | 3100 |
| | 14 ga. | 170 | 50 | N ₂ /H ₂ O | 2 | 4310 |
| | 12 ga. | 150 | | | 3 | 3660 |
| | 3/16 | 70 | | | 5 | 1523 |
| | 10 ga. | 120 | 70 | N ₂ /H ₂ O | 3 | 3040 |
| | 3/16 | 90 | | | 5 | 2140 |
| | 1/4 | 50 | | | 6 | 1495 |
| | 1/4 | 72 | 100 | N ₂ /H ₂ O | 6 | 1880 |
| | 3/8 | 55 | | | 10 | 1350 |
| | 1/2 | 42 | | | 12 | 1140 |
| | 1/4 | 70 | 100 | H35/N ₂ | 6 | 1810 |
| Aluminum | | | | | | |
| | 16 ga. | 140 | 50 | N ₂ /H ₂ O | 2 | 2990 |
| | 11 ga. | 60 | | | 3 | 1520 |
| | 3/16 | 40 | | | 5 | 950 |
| | 3/8 | 70 | 100 | N ₂ /H ₂ O | 10 | 1665 |
| | 1/2 | 40 | | | 12 | 1190 |
| | 5/8 | 35 | | | 15 | 925 |
| | 1/2 | 50 | 100 | H35/N ₂ | 12 | 1330 |

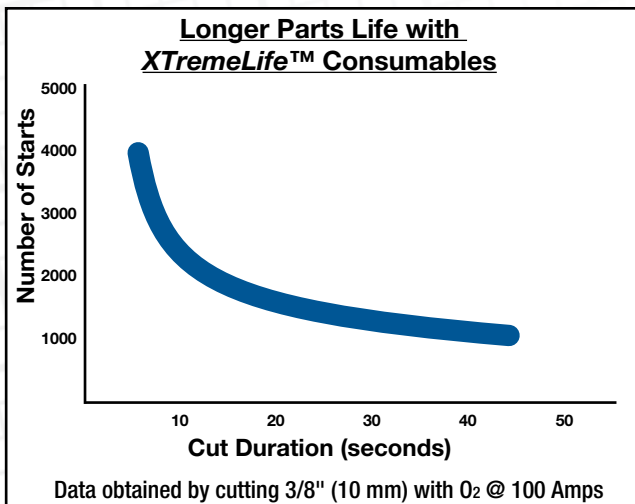

Note: This cutting speed chart includes preliminary data and is subject to change without notice. Take care in comparison. The speeds noted above are best cut speeds. Often, competitors show maximum cutting speeds. Although much higher speeds can be achieved, edge quality and bevel angle may be compromised. The capabilities shown in this table were obtained by using new consumables, correct gas and current settings, accurate torch height control and with the torch perpendicular to the workpiece. The operating chart does not list all processes available for the Ultra-Cut 100. Please contact Thermal Dynamics® for more information.

Ultra-Cut[®] 200

High Precision Plasma Cutting System

- **Production cut: 1" (25 mm)**
- **Maximum cut: 1½" (40 mm)**
- **Handles 85% of applications**
- **Highest cut speeds in the 200A range**

Specifications (subject to change without notice)

| | |
|-------------------------------|---|
| Rated Output | 200 Amps |
| Output Range (A) | 10 - 200 Amps |
| Output (V) | 80 - 180V |
| Input Volts | 208-230/460V, 3ph, 50-60 Hz, 400V, 3ph, 50-60 Hz, 600V, 3ph, 50-60 Hz |
| Input Amps @ Rated Output | 130A @ 208V, 125A @ 230V, 77A @ 400V, 75A @ 460V, 78A @ 600V |
| Duty Cycle (@104°F / 40°C) | 100% @ 200A @ 180V (36kW) |
| MAX OCV | 380 VDC |
| Pre-Flow Gas | Air @ 120 psi (8.3bar) |
| Plasma Gas | O ₂ , H35, N ₂ , Air @ 120 psi (8.3bar) |
| Shield Gas | O ₂ , N ₂ , Air @ 120 psi (8.3bar) H ₂ O @ 10 GPH (0.6 l/min) |
| Weight | Power Supply - 433 lbs. (197kg) |
| Dimensions | H 41.5" (1054 mm) x W 27.5" (700 mm) x D 38.5" (978 mm) (Fully Assembled Power Supply) |
| Warranty | Two Years Power Supply & One Year Torch |
| Certifications | CE, CCC, CSA |




Cutting Speed Chart

| | |
|---|-------------|
| Torch Model | XT™-Torch |
| Production Piercing & Cutting Capacity (Mild Steel) | 1" (25 mm) |
| Maximum Piercing & Cutting Capacity (Mild Steel) | 1½" (40 mm) |
| Maximum Edge Start (Mild Steel) | 2½" (65 mm) |

| Material | Thickness Inch | Speed IPM | Amps | Plasma/ Shield | Thickness mm | Speed mm/min. |
|------------------------|-------------------|--------------|------|----------------------------------|-----------------|------------------|
| Mild Steel | | | | | | |
| | 20 ga. | 130 | 30 | O ₂ /O ₂ | 1 | 3050 |
| | 10 ga. | 30 | | | 3 | 910 |
| | 10 ga. | 210 | 70 | O ₂ /Air | 3 | 6620 |
| | 1/4 | 120 | | | 6 | 3100 |
| | 1/4 | 150 | 100 | O ₂ /Air | 6 | 4030 |
| | 3/8 | 95 | | | 10 | 2300 |
| | 1/2 | 64 | | | 12 | 1800 |
| | 5/8 | 50 | | | 15 | 1370 |
| | 1/2 | 100 | 150 | O ₂ /Air | 12 | 2650 |
| | 3/4 | 50 | | | 20 | 1120 |
| | 1 | 25 | | | 25 | 650 |
| | 3/4 | 65 | 200 | O ₂ /Air | 20 | 1590 |
| | 1 | 48 | | | 25 | 1250 |
| Stainless Steel | | | | | | |
| | 20 ga. | 300 | 30 | N ₂ /H ₂ O | 1 | 7190 |
| | 16 ga. | 110 | | | 1.5 | 3100 |
| | 14 ga. | 170 | 50 | N ₂ /H ₂ O | 2 | 4310 |
| | 12 ga. | 150 | | | 3 | 3660 |
| | 3/16 | 70 | | | 5 | 1523 |
| | 3/16 | 90 | 70 | N ₂ /H ₂ O | 5 | 2140 |
| | 1/4 | 50 | | | 6 | 1495 |
| | 1/4 | 72 | 100 | H35/N ₂ | 6 | 1880 |
| | 3/8 | 55 | | | 10 | 1350 |
| | 1/2 | 42 | | | 12 | 1140 |
| | 1/4 | 70 | 100 | N ₂ /H ₂ O | 6 | 1810 |
| | 3/8 | 70 | 150 | N ₂ /H ₂ O | 10 | 1740 |
| | 1/2 | 60 | | | 12 | 1580 |
| | 5/8 | 50 | | | 15 | 1250 |
| | 3/4 | 45 | | | 20 | 1140 |
| | 3/4 | 50 | 200 | N ₂ /H ₂ O | 20 | 1100 |
| | 1 | 35 | | | 25 | 900 |
| | 3/4 | 40 | 200 | H35/N ₂ | 20 | 950 |
| | 1 | 30 | | | 25 | 770 |
| Aluminum | | | | | | |
| | 11 ga. | 60 | 50 | Air/Air | 3 | 1520 |
| | 3/16 | 40 | | | 5 | 950 |
| | 1/4 | 100 | 100 | N ₂ /H ₂ O | 6 | 2760 |
| | 1/2 | 75 | 150 | H35/N ₂ | 12 | 2100 |
| | 5/8 | 40 | | | 15 | 1260 |
| | 3/4 | 40 | 150 | N ₂ /H ₂ O | 20 | 960 |
| | 3/4 | 90 | 200 | N ₂ /H ₂ O | 20 | 2200 |
| | 1 | 50 | | | 25 | 1300 |
| | 3/4 | 70 | 200 | H35/N ₂ | 20 | 1600 |
| | 1 | 40 | | | 25 | 1050 |

Longer Parts Life with XTremeLife™ Consumables

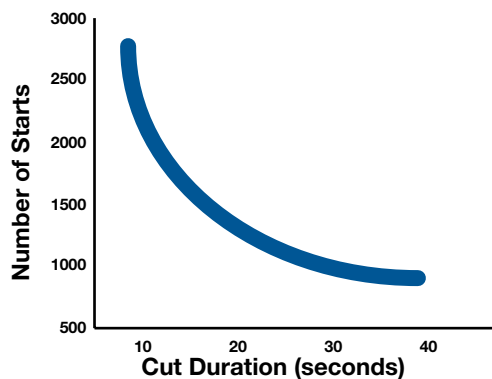

Data obtained by cutting 5/8" (15 mm) with O₂ @ 200 Amps

Note: This cutting speed chart includes preliminary data and is subject to change without notice. Take care in comparison. The speeds noted above are best cut speeds. Often, competitors show maximum cutting speeds. Although much higher speeds can be achieved, edge quality and bevel angle may be compromised. The capabilities shown in this table were obtained by using new consumables, correct gas and current settings, accurate torch height control and with the torch perpendicular to the workpiece. The operating chart does not list all processes available for the Ultra-Cut 200. Please contact Thermal Dynamics® for more information.

Automated Plasma Cutting

Ultra-Cut[®] 300

High Precision Plasma Cutting System

- Production cut: 1½" (40 mm)
- Maximum cut: 1¾" (45 mm)
- Ideal for bevel cutting up to 45° on 1½" (40 mm)
- Up to 3x faster than a single oxyfuel torch

Specifications (subject to change without notice)

| | |
|----------------------------|--|
| Rated Output | 300 Amps |
| Output Range (A) | 10 - 300 Amps |
| Output (V) | 80 - 180VDC |
| Input Volts | 208-230/460V, 3ph, 50-60 Hz, 400V, 3ph, 50-60 Hz, 600V, 3ph, 50-60 Hz |
| Input Amps @ Rated Output | 208A @ 208V, 188A @ 230V, 109A @ 400V, 112A @ 460V, 81A @ 600V |
| Duty Cycle (@104°F / 40°C) | 100% @ 300A @ 180V (54kW) |
| MAX OCV | 380 VDC |
| Pre-Flow Gas | Air @ 120 psi (8.3bar) |
| Plasma Gas | O ₂ , H35, N ₂ , Air @ 120 psi (8.3bar) |
| Shield Gas | O ₂ , N ₂ , Air @ 120 psi (8.3bar) H ₂ O @ 10 GPH (0.6 l/min). |
| Weight | Power Supply - 535 lbs. (243kg) |
| Dimensions | H 53.1" (1298 mm) x W 27.5" (700 mm) x D 38.5" (978 mm) (Fully Assembled Power Supply) |
| Warranty | Two Years Power Supply & One Year Torch |
| Certifications | CE, CCC, CSA |




Cutting Speed Chart

| | |
|---|-------------|
| Torch Model | XTT™-Torch |
| Production Piercing & Cutting Capacity (Mild Steel) | 1½" (40 mm) |
| Maximum Piercing & Cutting Capacity (Mild Steel) | 1¾" (45 mm) |
| Maximum Edge Start (Mild Steel) | 3" (75 mm) |

| Material | Thickness Inch | Speed IPM | Amps | Plasma/ Shield | Thickness mm | Speed mm/min. |
|-----------------------------|----------------|-----------|------|----------------------------------|--------------|---------------|
| Mild Steel Precision | | | | | | |
| | 20 ga. | 130 | 30 | O ₂ /O ₂ | 1 | 3050 |
| | 10 ga. | 30 | | | 3 | 910 |
| | 1/4 | 120 | 70 | O ₂ /Air | 6 | 3100 |
| | 1/4 | 150 | 100 | O ₂ /Air | 6 | 4030 |
| | 3/8 | 95 | | | 10 | 2300 |
| | 1 | 48 | 200 | O ₂ /Air | 25 | 1250 |
| | 1-1/4 | 30 | | | 35 | 750 |
| | 1-1/2 | 20 | | | 40 | 510 |
| | 3/4 | 100 | 300 | O ₂ /Air | 20 | 2540 |
| | 1 | 70 | | | 25 | 1780 |
| | 1-1/4 | 50 | | | 35 | 900 |
| | 3 | 7 | | | 70 | 285 |
| Stainless Steel | | | | | | |
| | 20 ga. | 300 | 30 | N ₂ /H ₂ O | 1 | 7190 |
| | 16 ga. | 110 | | | 1.5 | 3100 |
| | 14 ga. | 170 | 50 | N ₂ /H ₂ O | 2 | 4310 |
| | 12 ga. | 150 | | | 3 | 3660 |
| | 3/16 | 70 | | | 5 | 1523 |
| | 3/16 | 90 | 70 | N ₂ /H ₂ O | 5 | 2140 |
| | 1/4 | 50 | | | 6 | 1495 |
| | 1/4 | 72 | 100 | H35/N ₂ | 6 | 1880 |
| | 3/8 | 55 | | | 10 | 1350 |
| | 1/4 | 70 | 100 | N ₂ /H ₂ O | 6 | 1810 |
| | 3/4 | 50 | 200 | N ₂ /H ₂ O | 20 | 1100 |
| | 1 | 35 | | | 25 | 900 |
| | 1 | 40 | 300 | N ₂ /H ₂ O | 25 | 1030 |
| | 1-1/4 | 30 | | | 35 | 760 |
| | 1 | 35 | 300 | H35/N ₂ | 25 | 920 |
| | 1-1/4 | 30 | | | 35 | 760 |
| Aluminum | | | | | | |
| | 11 ga. | 60 | 50 | Air/Air | 3 | 1520 |
| | 3/16 | 40 | | | 5 | 950 |
| | 1/4 | 100 | 100 | N ₂ /H ₂ O | 6 | 2760 |
| | 3/8 | 70 | | | 10 | 1700 |
| | 3/4 | 90 | 200 | N ₂ /H ₂ O | 20 | 2200 |
| | 1 | 50 | | | 25 | 1300 |
| | 1 | 60 | 300 | N ₂ /H ₂ O | 25 | 1560 |
| | 1-1/4 | 40 | | | 35 | 1000 |
| | 1 | 85 | 300 | H35/N ₂ | 25 | 2190 |

Note: This cutting speed chart includes preliminary data and is subject to change without notice. Take care in comparison. The speeds noted above are best cut speeds. Often, competitors show maximum cutting speeds. Although much higher speeds can be achieved, edge quality and bevel angle may be compromised. The capabilities shown in this table were obtained by using new consumables, correct gas and current settings, accurate torch height control and with the torch perpendicular to the workpiece. The operating chart does not list all processes available for the Ultra-Cut 300. Please contact Thermal Dynamics® for more information.

Longer Parts Life with XTremeLife™ Consumables

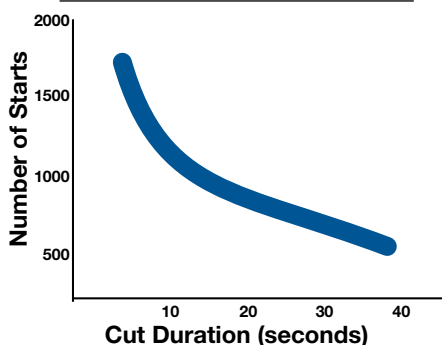

Data obtained by cutting 3/4" (20 mm) with O₂ @ 250 Amps

Ultra-Cut® 400

High Precision Plasma Cutting System

- Production cut: 2" (50 mm)
- Maximum cut: 2¼" (60 mm)
- Ideal for bevel cutting up to 45° and up to 2" (50 mm)

Specifications (subject to change without notice)

| | |
|----------------------------|---|
| Rated Output | 400 Amps |
| Output Range (A) | 10 - 400 Amps |
| Output (V) | 80 - 200VDC |
| Input Volts | 208-230/460V, 3ph, 50-60 Hz, 400V, 3ph, 50-60 Hz, 460V, 3ph, 50-60 Hz |
| Input Amps @ Rated Output | 336A @ 208V, 304A @ 230V, 174A @ 400V, 148A @ 460V |
| Duty Cycle (@104°F / 40°C) | 100% @ 400A @ 200V (80kW) |
| MAX OCV | 380 VDC |
| Pre-Flow Gas | Air @ 120 psi (8.3bar) |
| Plasma Gas | O ₂ , H35, N ₂ , Air @ 120 psi (8.3bar) |
| Shield Gas | O ₂ , N ₂ , Air, H35 @ 120 psi (8.3bar) H ₂ O @ 10 GPH (0.6 l/min). |
| Weight | Power Supply - 636 lbs. (289kg) |
| Dimensions | H 53.1" (1298 mm) x W 27.5" (700 mm) x D 38.5" (978 mm) (Fully Assembled Power Supply) |
| Warranty | Two Years Power Supply & One Year Torch |
| Certifications | CE, CCC, CSA |




Cutting Speed Chart

| | |
|--|-----------------------------------|
| Torch Model | XT™-Torch |
| Production Piercing & Cutting Capacity | 2" (50 mm) |
| Maximum Piercing & Cutting Capacity (Aluminum) | 2¼" (60 mm) |
| Maximum Edge Start | 4" (100 mm) (MS) 3½" (90 mm) (SS) |

| Material | Thickness Inch | Speed IPM | Amps | Plasma/ Shield | Thickness mm | Speed mm/min. |
|-----------------------------|----------------|-----------|------|----------------------------------|--------------|---------------|
| Mild Steel Precision | | | | | | |
| | 10 ga. | 30 | 30 | O ₂ /O ₂ | 3 | 910 |
| | 1/4 | 120 | 70 | O ₂ /Air | 6 | 3100 |
| | 1/4 | 150 | 100 | O ₂ /Air | 6 | 4030 |
| | 3/8 | 95 | | | 10 | 2300 |
| | 1 | 48 | 200 | O ₂ /Air | 25 | 1250 |
| | 1-1/4 | 30 | | | 35 | 750 |
| | 3/4 | 100 | 300 | O ₂ /Air | 20 | 2540 |
| | 1 | 70 | | | 25 | 1780 |
| | 1-1/4 | 50 | | | 35 | 900 |
| | 1 | 80 | 400 | O ₂ /Air | 25 | 2100 |
| | 1-1/2 | 45 | | | 40 | 1330 |
| | 2 | 30 | | | 50 | 790 |
| Stainless Steel | | | | | | |
| | 16 ga. | 110 | 30 | N ₂ /H ₂ O | 1.5 | 3100 |
| | 14 ga. | 170 | 50 | N ₂ /H ₂ O | 2 | 4310 |
| | 3/16 | 70 | | | 5 | 1523 |
| | 1/4 | 50 | 70 | N ₂ /H ₂ O | 6 | 1495 |
| | 1/4 | 72 | 100 | H35/N ₂ | 6 | 1880 |
| | 3/8 | 55 | | | 10 | 1350 |
| | 1/4 | 70 | 100 | N ₂ /H ₂ O | 6 | 1810 |
| | 3/4 | 50 | 200 | N ₂ /H ₂ O | 20 | 1100 |
| | 1 | 35 | | | 25 | 900 |
| | 1 | 40 | 300 | N ₂ /H ₂ O | 25 | 1030 |
| | 1-1/4 | 30 | | | 35 | 760 |
| | 1 | 35 | 300 | H35/N ₂ | 25 | 920 |
| | 1-1/2 | 30 | | | 40 | 760 |
| | 3/4 | 90 | 400 | N ₂ /H ₂ O | 20 | 2286 |
| | 1-1/2 | 30 | | | 40 | 760 |
| | 1 | 45 | 400 | H35/N ₂ | 25 | 1170 |
| | 2 | 17 | | | 50 | 440 |
| | 4 | 3.5 | 400 | H35/H35 | 100 | 90 |
| Aluminum | | | | | | |
| | 11 ga. | 60 | 50 | Air/Air | 3 | 1520 |
| | 1/4 | 100 | 100 | N ₂ /H ₂ O | 6 | 2760 |
| | 3/8 | 70 | | | 10 | 1700 |
| | 3/4 | 90 | 200 | N ₂ /H ₂ O | 20 | 2200 |
| | 1 | 50 | | | 25 | 1300 |
| | 1 | 60 | 300 | N ₂ /H ₂ O | 25 | 1560 |
| | 1-1/4 | 40 | | | 32 | 1000 |
| | 1 | 85 | | H35/N ₂ | 25 | 2190 |
| | 3/4 | 90 | 400 | N ₂ /H ₂ O | 20 | 2200 |
| | 1-1/2 | 55 | | | 40 | 1350 |
| | 1 | 90 | 400 | H35/N ₂ | 25 | 2330 |
| | 2 | 30 | | | 50 | 810 |

Note: This cutting speed chart includes preliminary data and is subject to change without notice. Take care in comparison. The speeds noted above are best cut speeds. Often, competitors show maximum cutting speeds. Although much higher speeds can be achieved, edge quality and bevel angle may be compromised. The capabilities shown in this table were obtained by using new consumables, correct gas and current settings, accurate torch height control and with the torch perpendicular to the workpiece. The operating chart does not list all processes available for the Ultra-Cut 400. Please contact Thermal Dynamics® for more information.

Longer Parts Life with XTremeLife™ Consumables

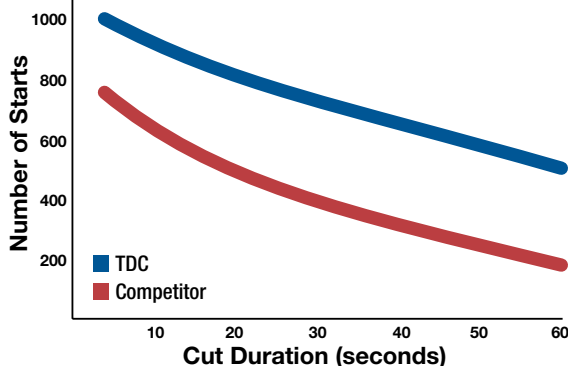

Data obtained by cutting 1" (25 mm) with O₂ @ 400 Amps

* Parts life Ultra-Cut 400 with DFC-3000 Automatic Gas Console

Automated Plasma Cutting

Height Control: SC-3100 and SC-3200

Features

Torch Height Adjustable in Distance or Voltage

Distance mode:

- Change speed without changing stand-off height
- Automatically adjusts for electrode wear
- Cut continuously at peak performance

Voltage mode:

- Ideal for contoured materials

Built-in Collision Sensor

- No costly sensor to replace
- No air source required at lifter station
- Works in X-Y-Z planes; works in all directions

Arc Voltage Range

- Ready for most applications, from plasma marking to cutting the thickest materials

Easy to Operate

- High contrast display for maximum visibility
- Operating parameters accessed using two drop-down menus

Fast Installation

- Easily connects to most CNC and plasma systems on the market today

Pierce Retract

- Lifts torch after initial piercing to increase pierce capacity

Direct Control

- Lifter can be controlled directly from CNC interface; no separate terminal necessary

Instant Pierce Height

- Adjustable torch height for better initial pierce height finding on gauge materials



Specifications (subject to change without notice)

| Lifter Station | SC-3100 | SC-3200 |
|-------------------|-------------------------|----------------------|
| Height: | 18.70" (475 mm) | 19.76" (502 mm) |
| Width: | 3.93" (100 mm) | 4.92" (125 mm) |
| Depth: | 6.73" (171 mm) | 8.97" (228 mm) |
| Weight: | 22 lbs. (10 kg) | 26.4 lbs (12 kg) |
| Position Speed: | 283.5 ipm (120 mm/sec.) | 190 ipm (80 mm/sec.) |
| Stroke: | 4.72" (120 mm) | 8.66" (220 mm) |
| Lifting Capacity: | 15.4 lbs. (7 kg) | 26.4 lbs (12 kg) |



Remote Terminal

SC-3100

SC-3200

Ultra-Cut® Systems Include

- Power supply
- Supply leads to remote arc starter
- Manual Gas console (GCM-2010) or Automated Digital Flow Controller (DFC-3000)
- Torch installation starter kit
- Remote arc starter (RAS-1000)
- Torch leads



DFC-3000



RAS-1000

Manual Gas Box

Power Supply

Options And Accessories

- Spare parts kit
- Wheel kit
Cat. No. 9-9379
- TSC-3000 (Touch Screen Controller)
- Ohmic clip
Cat. No. 9-9414
- Water filter
Cat. No. 9-1068
- Water filter cartridge
Cat. No. 9-1069
- Water pressure regulator
Cat. No. 8-6118
- RAS shelf kit and hardware
Cat. No. 9-9484

Torch Coolant



Extra Cool Coolant

Cat No. 7-3580

Resists freezing down to +10° (-12°C)

Ultra Cool Coolant

Cat. No. 7-3581

Resists freezing down to -27° (-33°C)

Extreme Cool Coolant

Cat. No. 7-3582

Resists freezing down to -65°F (-51°C)

De-I Cool Coolant

Cat. No. 7-3583

De-ionized water mixture for use where freezing protection is not required

For complete ordering information contact Thermal Dynamics® or your local Thermal Dynamics Automation Distributor.

performance

technology

reliability

innovation

service



DISTRIBUTED BY:

U.S. Plasma Automation Customer Care: 866-279-2628 / FAX 800-535-0557 • Canada Customer Care: 905-827-4515 / FAX 800-588-1714
International Customer Care: 940-381-1212 / FAX 940-483-8178 • www.thermal-dynamics.com



A Global Cutting & Welding Market Leader™

WORLD HEADQUARTERS: 16052 Swingley Ridge Road, Suite 300 • St. Louis, Missouri 63017 U.S.A.

THE AMERICAS

Denton, TX USA
U.S. Customer Care
Ph: 1-800-426-1888 (tollfree)
Fax: 1-800-535-0557 (tollfree)
International Customer Care
Ph: 1-940-381-1212
Fax: 1-940-483-8178

Miami, FL USA
Sales Office, Latin America
Ph: 1-954-727-8371
Fax: 1-954-727-8376

Oakville, Ontario, Canada
Canada Customer Care
Ph: 1-905-827-4515
Fax: 1-800-588-1714 (tollfree)

EUROPE

Chorley, United Kingdom
Customer Care
Ph: +44 1257-261755
Fax: +44 1257-224800

Milan, Italy
Customer Care
Ph: +39 0236546801
Fax: +39 0236546840

ASIA/PACIFIC

Cikarang, Indonesia
Customer Care
Ph: 6221-8990-6095
Fax: 6221-8990-6096

Rawang, Malaysia
Customer Care
Ph: +603 6092-2988
Fax: +603 6092-1085

Melbourne, Australia
Australia Customer Care
Ph: 1300-654-674 (tollfree)
Ph: 61-3-9474-7400
Fax: 61-3-9474-7391
International
Ph: 61-3-9474-7508
Fax: 61-3-9474-7488

Shanghai, China
Sales Office
Ph: +86 21-64072626
Fax: +86 21-64483032

Singapore
Sales Office
Ph: +65 6832-8066
Fax: +65 6763-5812